

HB-DJ812

Data Sheet


812V220T20A



WUXI HONGBA
Linear Actuator

Overview

1. Optional AC/ Servo/ Brushed/ Brushless motor ;
2. Customizable stroke 50mm - 1000mm ;
3. Speed 19.5-83 mm/s ;
4. Max force 20,000 N ;
5. Operating temp. -15 °C to 40 °C ;
6. Endstop signal output, not cut off power supply automatically at either end of stroke ;
7. Weather protection IP55 ;
8. CE certified ;
9. Suggest re-greasing every 3000 cycles.

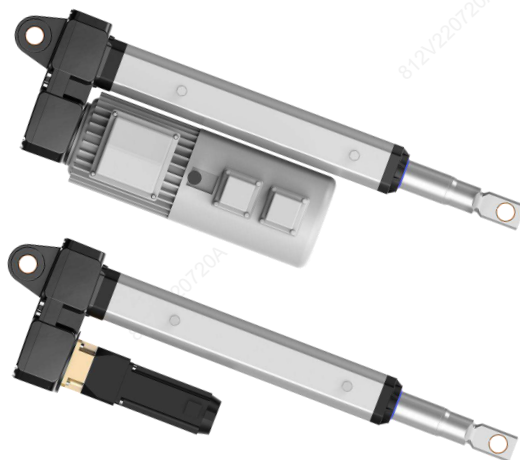

Parameters

1. Three-phase AC Motor

Code	Ratio (Belt)	Ratio (Gear)	Free-Load Speed	Full-Load Speed	Max. Dynamic Force	Max. Self-Locking	Free-Load Current	Full-Load Current	Ball Screw Item No.	Parameters of AC Motor
			mm/s	mm/s	N	N	A	A		
A	20 : 40	1 : 3	20.8	19.5	20,000	22,000	0.4	2.2	GQ3205	380V AC, 0.75KW, 50Hz, 4-pole, 1500 rpm, 30-70Hz
B	27 : 34	1 : 3	33.1	30.9	10,000	12,000	0.4	1.7	GQ3205	
C	20 : 40	N/A	62.5	58.3	5,000	7,000	0.4	1.6	GQ3205	

* Duty cycle 100% with full load and ambient temperature at 20°C.

[Table 1]

2. Servo Motor

Code	Ratio (Belt)	Ratio (Gear)	Free-Load Speed	Full-Load Speed	Max. Dynamic Force	Max. Self-Locking	Free-Load Current	Full-Load Current	Ball Screw Item No.	Parameters of Servo Motor
			mm/s	mm/s	N	N	A	A		
E	20 : 40	1 : 6	20.8	20	20,000	22,000	0.7	3.7	GQ3205	220V AC, 0.75KW, 50Hz 3,000 rpm
F	20 : 40	1 : 3	41.7	40	10,000	12,000	0.7	3.7	GQ3205	
G	27 : 34	1 : 3	66.2	65	5,000	7,000	0.7	3.0	GQ3205	

* Duty cycle 100% with full load and ambient temperature at 20°C.

[Table 2]

3. Brushless Motor - 48VDC

Code	Ratio (Belt)	Motor Rotation	Free-Load Speed	Full-Load Speed	Max. Dynamic Force	Max. Self- Locking	Voltage	Free-Load Current	Full-Load Current	Ball Screw Item No.
		rpm	mm/s	mm/s	N	N		A	A	
H	20 : 40	500	21	20	20,000	22,000	48	1.9	18	GQ3205
I	20 : 40	1,000	42	40	10,000	12,000	48	1.9	18	GQ3205
J	20 : 40	2,000	83	80	5,000	7,000	48	1.9	18	GQ3205

* Duty cycle 50% with full load and ambient temperature at 20°C.

[Table 3]

4. Brushed Motor - 48VDC

Code	Ratio (Belt)	Motor Rotation	Free-Load Speed	Full-Load Speed	Max. Dynamic Force	Max. Self- Locking	Voltage	Free-Load Current	Full-Load Current	Ball Screw Item No.
		rpm	mm/s	mm/s	N	N		A	A	
K	20 : 40	500	21	20	20,000	22,000	48	1.9	16.5	GQ3205
L	20 : 40	1,000	42	40	10,000	12,000	48	1.9	16.5	GQ3205
M	20 : 40	2,000	83	83	5,000	7,000	48	1.9	16.5	GQ3205

* Duty cycle 20% with full load and ambient temperature at 20°C.

[Table 4]

5. Brushed DC Motor - 24V


Code	Ratio (Belt)	Motor Rotation	Free-Load Speed	Full-Load Speed	Max. Dynamic Force	Max. Self- Locking	Voltage	Free-Load Current	Full-Load Current	Ball Screw Item No.
		rpm	mm/s	mm/s	N	N		A	A	
N	20 : 40	500	21	20	20,000	22,000	24	3.8	33	GQ3205
O	20 : 40	1,000	42	40	10,000	12,000	24	3.8	33	GQ3205
P	20 : 40	2,000	83	80	5,000	7,000	24	3.8	33	GQ3205

* Duty cycle 15% with full load and ambient temperature at 20°C.

[Table 5]


Dimension

1. Three-phase AC Motor

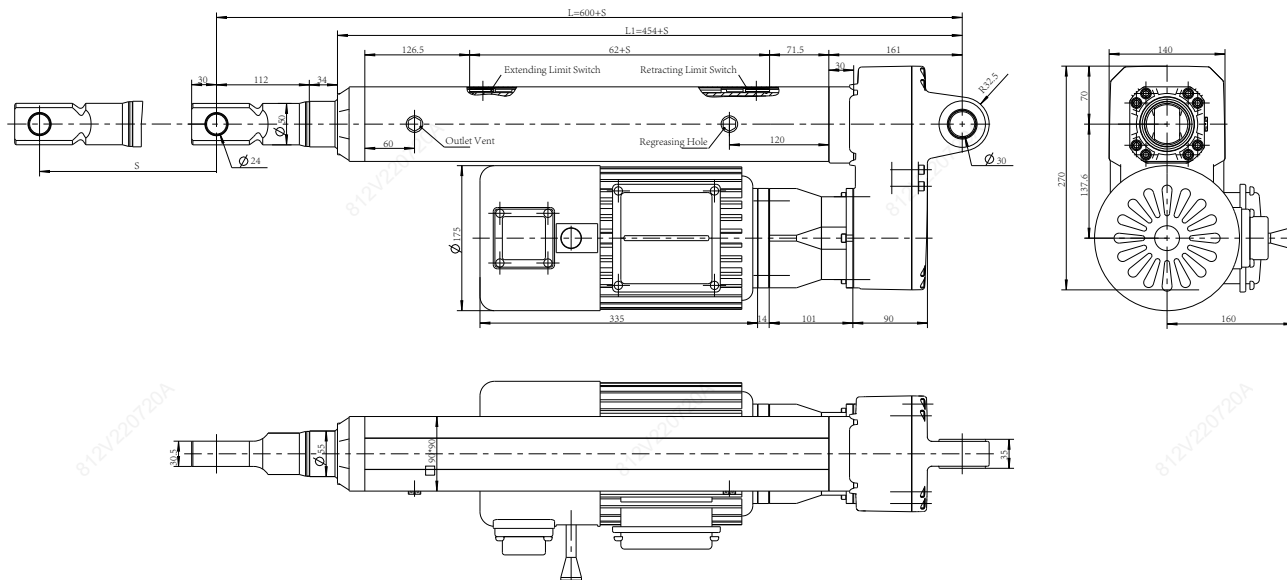

- Stroke $\leq 1,000$ mm
- Install. Length (L) = Stroke (S) + 600mm, must be ≥ 800 mm
- Front mount. hole can be rotated by 90°


2. Servo Motor

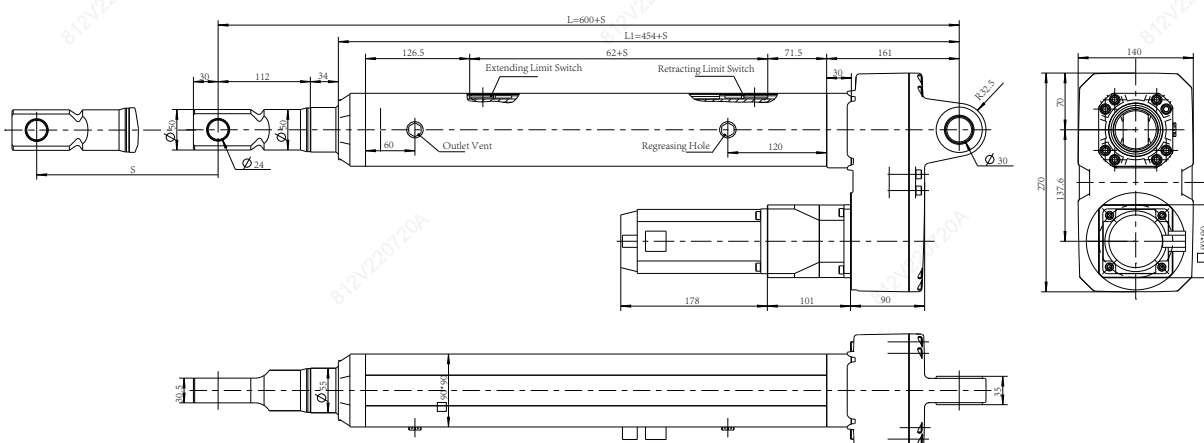

- Stroke $\leq 1,000$ mm
- Install. Length (L) = Stroke (S) + 600mm
- Front mount. hole can be rotated by 90°


Dimension

3. Brushless DC Motor

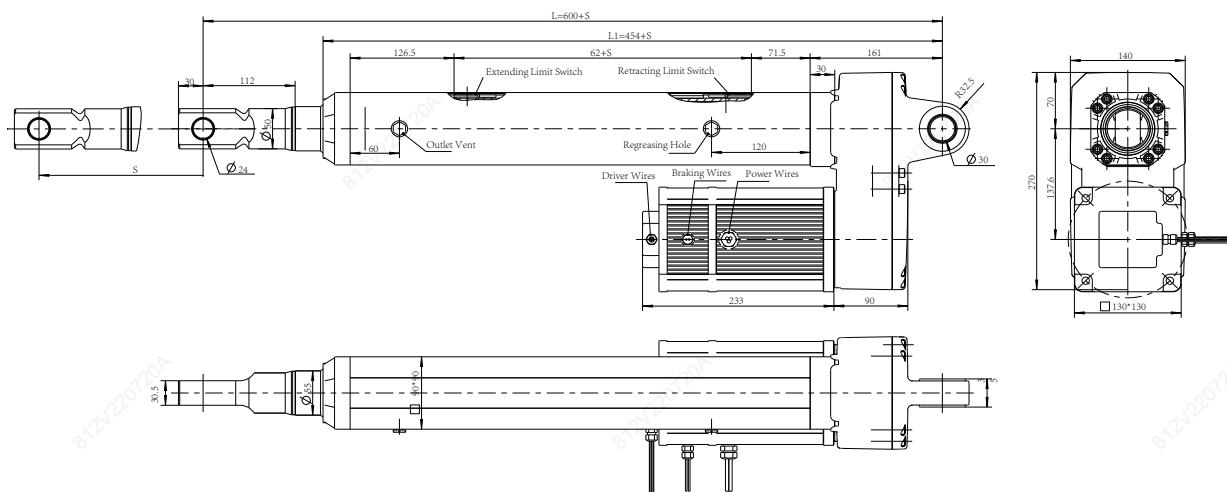

- Stroke $\leq 1,000$ mm
- Install. Length (L) = Stroke (S) + 600mm
- Front mount. hole 0° can be rotated by 90°

4. Brushed DC Motor

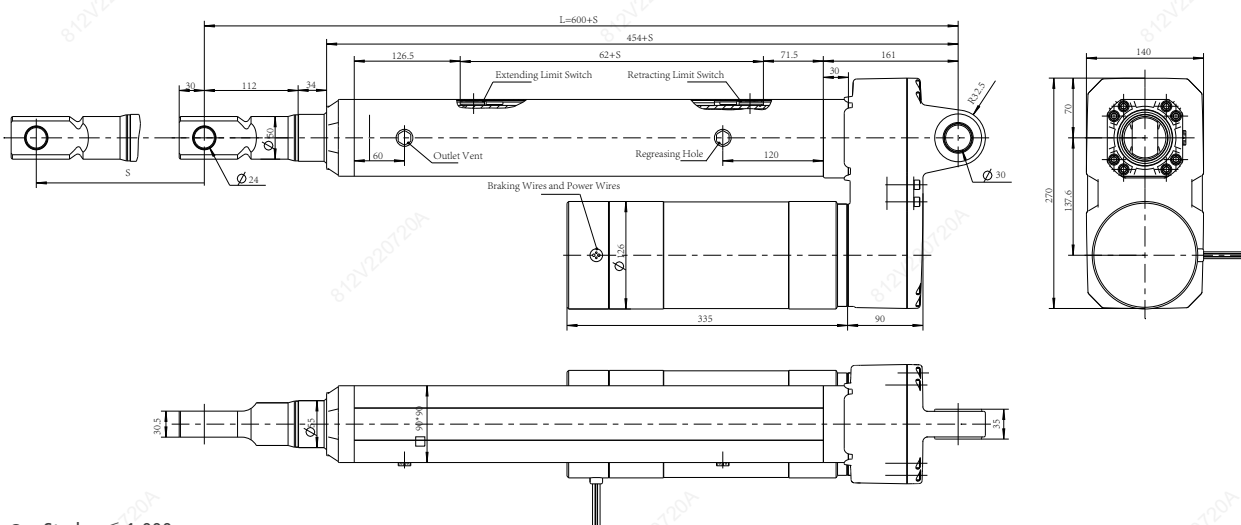

- Stroke $\leq 1,000$ mm
- Install. Length (L) = Stroke (S) + 600mm, must be ≥ 700 mm
- Front Mount. Hole 0° . Can be rotated by 90°

Inquiry Table

RESET

	Motor Type	1 = 220V AC Motor 4 = 48V Brushed DC Motor	2 = 380V AC Servo Motor 5 = 24V Brushed DC Motor	3 = 48V Brushless DC Motor
	Code	See Table 1 - 5		
	Stroke (mm)	≤ 1,000 mm		
	Install. Length (mm)	= stroke + 600mm (Install. length ≥ 800mm for three-phase AC motor)		
	Front Mount. End	F01 = Thru. Hole φ 24 FX = Custom		
	Rear Mount. End	R01 = Thru. Hole φ 30 RX = Custom		
	Mount. Hole Direction	Front 1 = 90° 2 = 0° Rear 1 = 90° X = Custom		
	Lead Screw	1 = Ball Screw		
	Cable Length	1 = 600mm 2 = 1,000mm X = Custom		
	Connector	0 = Tinned bared wires X = Custom		
	Working Frequency	Estimated cycles work per day		
	End Use	Indoor or outdoor, end use (Understand your application could help facilitate a good solution.)		
	Your Contact	Company Name Tel.	Email	

Terms of Use

Due to our continuous improving of HB products, Hongba reserves the right to change or modify our products without prior notice, at any time. Therefore, Hongba cannot guarantee the correct and actual status of said information on its products. The user is responsible for determining the suitability of HB products for specific application.

Wuxi Hongba Mechanical Electrical Equipment. Co., Ltd.

Cell:

Email:

Tel.: 0510-85436730

Website: hbactuator.com

Address: 5 Lijiang Rd. Xinwu District, Wuxi 214028 China