

HB-DJ830

Data Sheet



15	Stroke	1000mm
16	Stroke speed	100mm/s
17	Stroke time	10s
18	Stroke force	1000N
19	Stroke force	1000N
20	Stroke force	1000N
21	Stroke force	1000N
22	Stroke force	1000N
23	Stroke force	1000N
24	Stroke force	1000N
25	Stroke force	1000N
26	Stroke force	1000N
27	Stroke force	1000N
28	Stroke force	1000N
29	Stroke force	1000N
30	Stroke force	1000N
31	Stroke force	1000N
32	Stroke force	1000N
33	Stroke force	1000N
34	Stroke force	1000N
35	Stroke force	1000N
36	Stroke force	1000N
37	Stroke force	1000N
38	Stroke force	1000N
39	Stroke force	1000N
40	Stroke force	1000N
41	Stroke force	1000N
42	Stroke force	1000N
43	Stroke force	1000N
44	Stroke force	1000N
45	Stroke force	1000N
46	Stroke force	1000N
47	Stroke force	1000N
48	Stroke force	1000N
49	Stroke force	1000N
50	Stroke force	1000N
51	Stroke force	1000N
52	Stroke force	1000N
53	Stroke force	1000N
54	Stroke force	1000N
55	Stroke force	1000N
56	Stroke force	1000N
57	Stroke force	1000N
58	Stroke force	1000N
59	Stroke force	1000N
60	Stroke force	1000N
61	Stroke force	1000N
62	Stroke force	1000N
63	Stroke force	1000N
64	Stroke force	1000N
65	Stroke force	1000N
66	Stroke force	1000N
67	Stroke force	1000N
68	Stroke force	1000N
69	Stroke force	1000N
70	Stroke force	1000N
71	Stroke force	1000N
72	Stroke force	1000N
73	Stroke force	1000N
74	Stroke force	1000N
75	Stroke force	1000N
76	Stroke force	1000N
77	Stroke force	1000N
78	Stroke force	1000N
79	Stroke force	1000N
80	Stroke force	1000N
81	Stroke force	1000N
82	Stroke force	1000N
83	Stroke force	1000N
84	Stroke force	1000N
85	Stroke force	1000N
86	Stroke force	1000N
87	Stroke force	1000N
88	Stroke force	1000N
89	Stroke force	1000N
90	Stroke force	1000N
91	Stroke force	1000N
92	Stroke force	1000N
93	Stroke force	1000N
94	Stroke force	1000N
95	Stroke force	1000N
96	Stroke force	1000N
97	Stroke force	1000N
98	Stroke force	1000N
99	Stroke force	1000N
100	Stroke force	1000N



Dear Customers ,


What a big world ! But thanks to crazy technology, it's been getting smaller than ever, so that we can meet here from all corners of the world. It's our pleasure to have opportunities to provide you with a variety of products and services to help with the implementation of your amazing designs.

We present our products thoroughly in front of you by using refined parameters and words, so that you can find the most suitable solution.

Next, we will take you to a deeper understanding of Hongba's products. Please read this datasheet carefully. You are also welcome to leave valuable comments and suggestions to help Hongba improve itself continuously.

HB Engineer Team

Definition of Terms

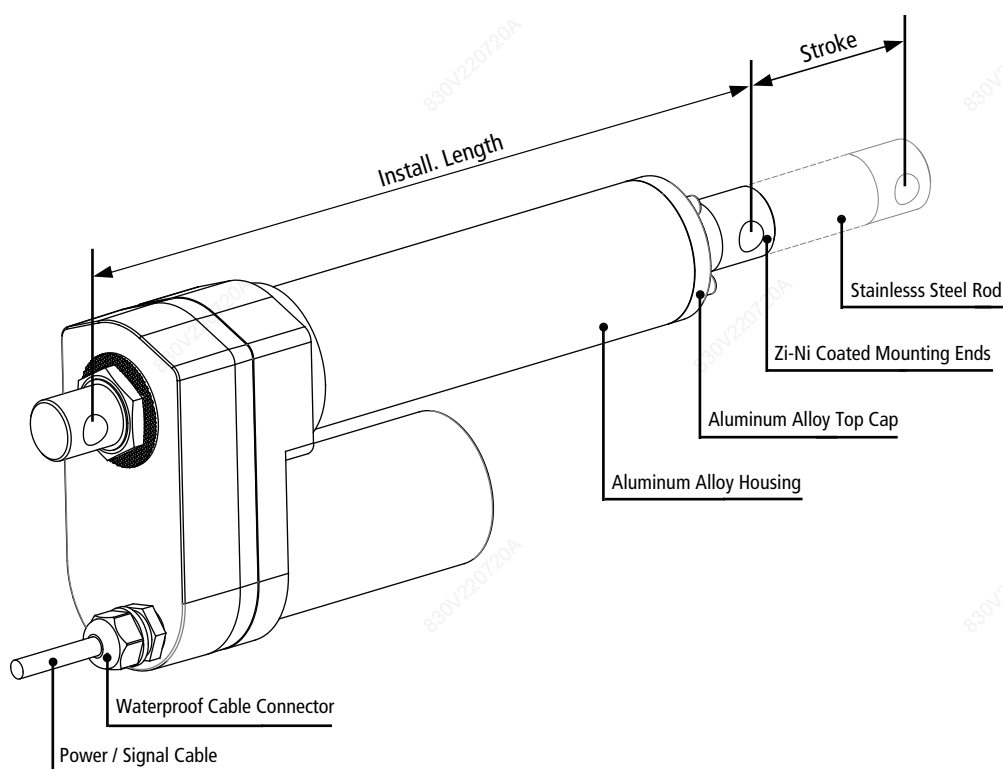

Stroke	How far the rod extends outwards from the body. The difference between fully extended length and fully retracted length. [Customizable]
Install. Length	The fully closed size. [Customizable]
Front Mount. End	Optional.
Rear Mount. End	Optional.
Mount. Holes	Can be rotated by 90°.
Dynamic Force	The max force that actuator is able to carry when it is moving.
Selflocking	The max force that linear actuator is able to hold when it stops.
Weather Protection	IP XX. The first digit: dust protection. The second digit: liquid protection. Please refer to [Table 1].
Duty Cycle	Continuous working time 'a', rest time 'b'. Duty cycle is $a/(a+b) \times 100\%$. Please refer to [Table 1].
Speed	Include free-load speed and full-load speed.
Hall Sensor	Provide pulse signals. Displacement measurement is achieved through pulse counting, and the phase difference of the waveform can be used to identify the rotation direction of motor. Check [Table 1] to see if it is available.
Potentiometer	Potentiometer is a three-terminal variable resistor with a rotating contact which is used to measure the displacement of actuators. Check [Table 1] to see if it is available.
Manual Override	Can be used to extend or retract the actuator without power for emergency. Check [Table 1] to see if it is available.

Configs.

Color	☐ Silver	☒ Black	☐ Customized				
Lead Screw	☒ Acme Screw	☐ Ball Screw					
Operation Mode	☒ Electrical	☐ Electrical + Manual					
Application	☒ Industrial	☐ Furniture	☐ Medical				
Operational Temp.	☐ 5 to 40℃	☒ -10 to 65℃	☒ -40 to 65℃				
Operating Noise	☐ ≤45 dB	☐ ≤50 dB	☒ ≤65 dB				
Stroke Range	☒ 50-600mm	☒ 600-1,000mm					
Dynamic Load	☐ ≤1,200N	☐ ≤2,000N	☒ ≤4,000N	☐ ≤7,000N	☐ ≤12,000N	☐ ≤20,000N	
Duty Cycle	☐ 10%	☐ 20%	☒ 25%*	☐ 50%	☐ 100%		
Motor Type	☒ Brushed DC	☐ Stepper Motor	☐ Brushless	☐ Servo Motor			
Overload Protection	☐ None	☒ Clutch	☐ Electronic	☐ Thermistor			
Weather Protection	☐ IP20	☐ IP43	☐ IP54	☒ IP65	☐ IP66		
Position Feedback	☒ None	☒ Endstop Signal	☒ Hall Sensor	☐ Potentiometer	☐ Encoder	☒ Reed Switches	
Input Voltage	☒ 12VDC	☒ 24VDC	☒ 36VDC	☒ 48VDC	☐ 110VAC	☐ 220VAC	

* Don't exceed four minutes continuous working at full load with 20℃.

☒ Options for DJ830 ☐ Other Models

[Table 1]

Parameters

Fill in code:






Code	Max. Dynamic Load ^②	Max. Self-locking	Reduction Ratio	Pitch	Speed±10% ^① (mm/s)		Max. Stroke ^③
	(N)	(N)	-	(mm)	Free Load	Full Load	(mm)
A	4,000	5,000	40:1	3.17	5.5	4.0	1,000
B	3,500	5,000	40:1	5	8.5	7.0	1,000
C	3,000	4,000	20:1	3.17	11.0	9.5	1,000
D	2,500	3,500	20:1	5	17.0	14.0	1,000
E	2,000	2,500	10:1	3.17	22.0	18.0	1,000
F	1,000	2,000	10:1	5	35.0	28.5	1,000

[Table 2]

- ① Measurements are made with actuators in connection with stable power supplies and ambient temperature at 20℃.
- ② For example, when real load is 2400N, choosing code (D) is fine. Of course, you can also choose (C), (B) or even (A) which come with more load buffer, higher safety factor and longer product service time.
- ③ There are many factors affecting the "customizable maximum stroke", such as load, speed, force direction, etc., so the real application scenarios should be considered. If the parameters you required are not listed, please contact our sales engineers.

Charts

Fill in code:

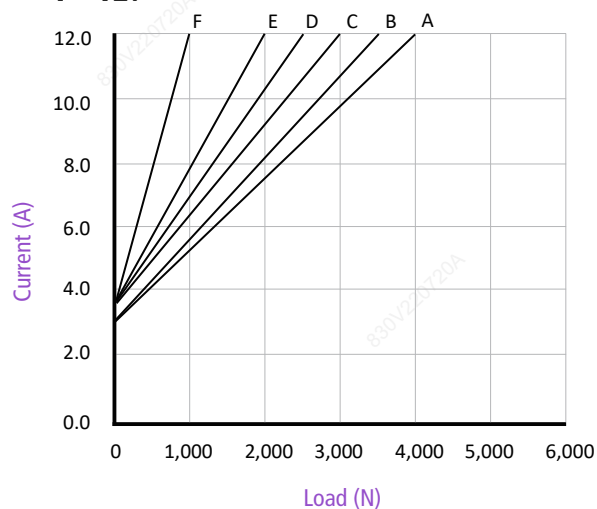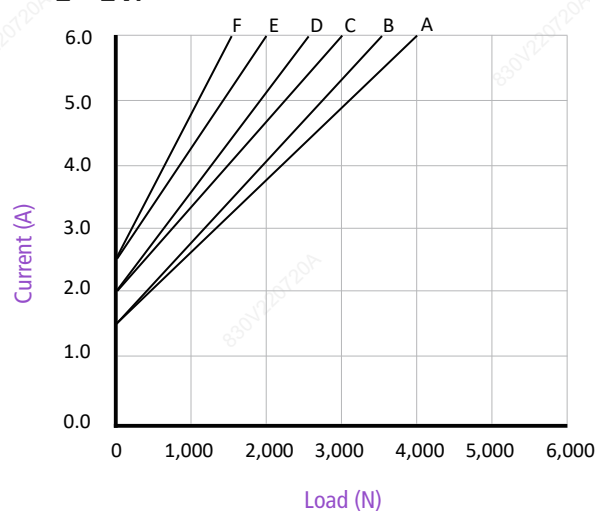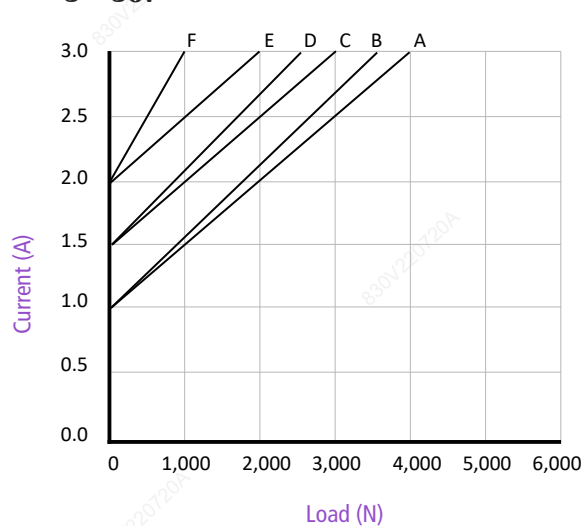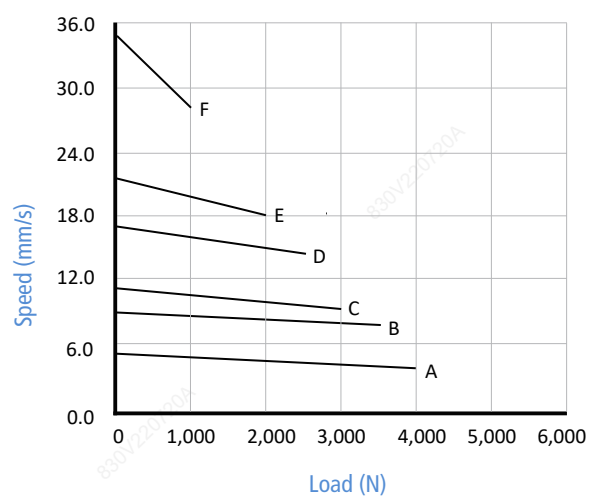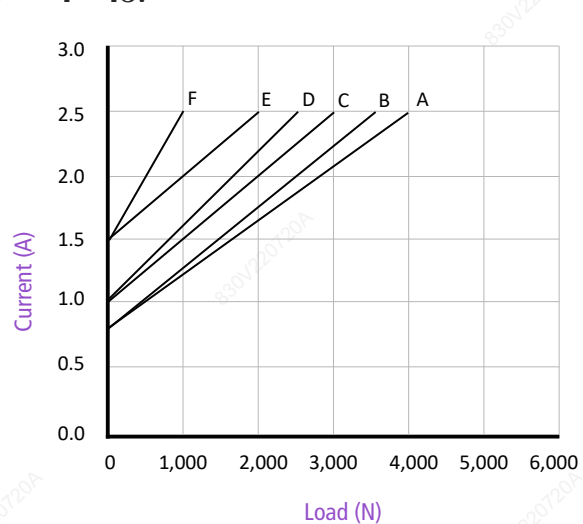
1 = 12v**2 = 24v****3 = 36v****4 = 48v**

* Measurements are made with actuators in connection with stable power supplies and ambient temperature at 20°C.


Front Mounting End

1. Please contact our sales team if none of the options below meet your requirements.


Fill in code:




F01




F02




F03




F04

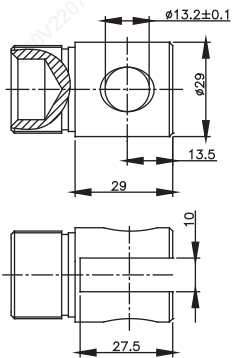


F05

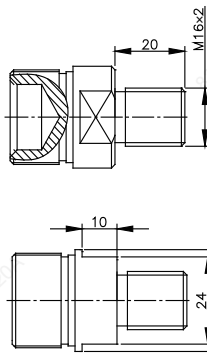


F06

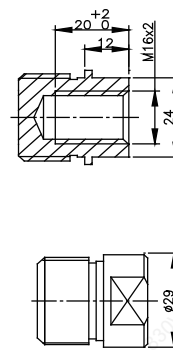

F07




F08




F09

2. Start of Installation Length



3. Hole Directions

Fill in code:

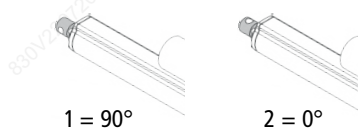


1 = 90°

2 = 0°


Rear Mounting End

1. Please contact our sales team if none of the options below meet your requirements.


Fill in code:




R01




R02




R03




R04



R05




R06



R07

2. End of Installation Length



3. Hole Directions

Fill in code:




1 = 90°

2 = 0°

Overall Dimension

S = mm, L = mm

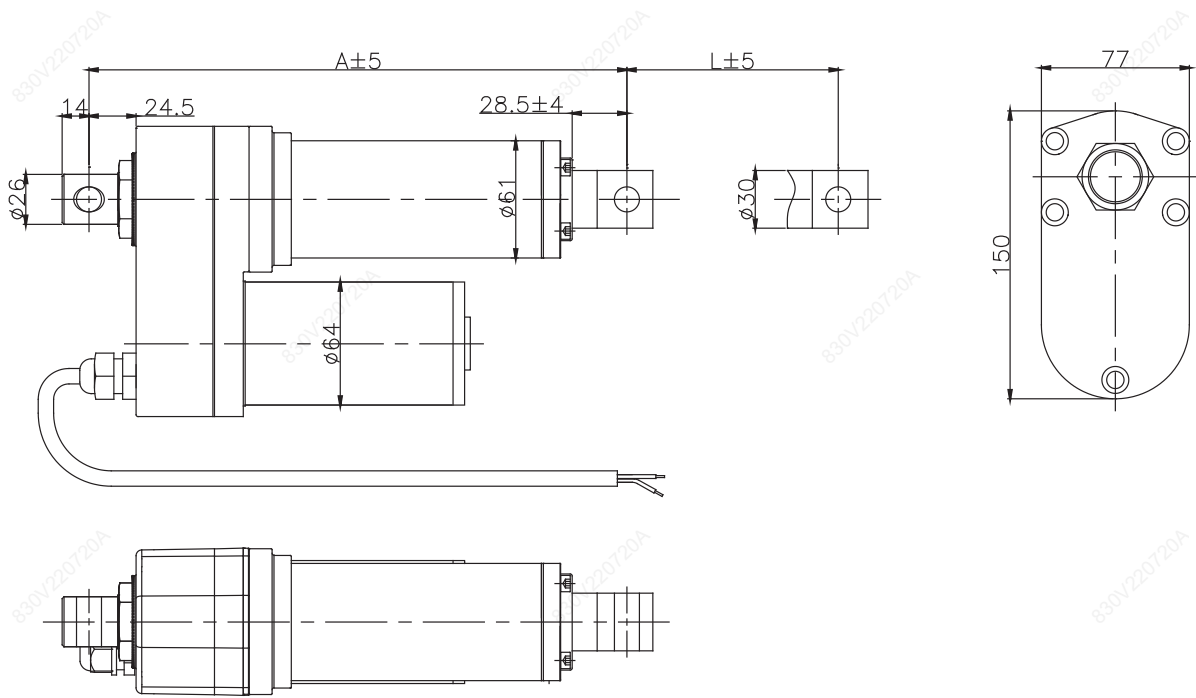

A. Mounting Ends VS Install. Length

Front Mount. Ends	Rear Mount. Ends
	R01, R02, R03, R04, R05, R06, R07
F01, F02, F03, F04, F05, F06, F07	$A \geq S+200$ mm (min. 250)
F08, F09	$A \geq S+250$ mm (min. 280)

[Table 3]

B. Stroke VS Install. Length

Stroke (S) (mm)	Install. Length (L) (mm)
50 - 399	+ 0
≥ 400	+ 50

[Table 4]

How to calculate 'Install. Length' ?
S = Stroke, L = Install Length, $L \geq A + B$

Example

Front Mount.	Rear Mount.	S (mm)	A (mm)	B (mm)	$L \geq A+B$ (mm)
F08	R01	300	300+250	+0	≥ 550

[Table 5]


Signal Feedback

Fill in code:

0 = None
 1 = Endstop Signal
 2 = Hall Sensor
 3 = Reed Switches

0. Standard Limit Switches without Signal feedback

Standard DJ830 comes with limit switches that shut off the motor automatically at the end of its travel.

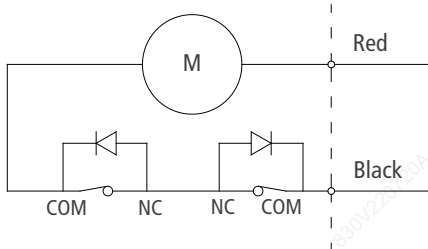


Wiring		
	Black	Red
Extend	-	+
Retract	+	-

[Table 6]

1. Endstop Signal



The actuator can be equipped with endstop signals output, but it will not auto-stop at neither end of the travel.

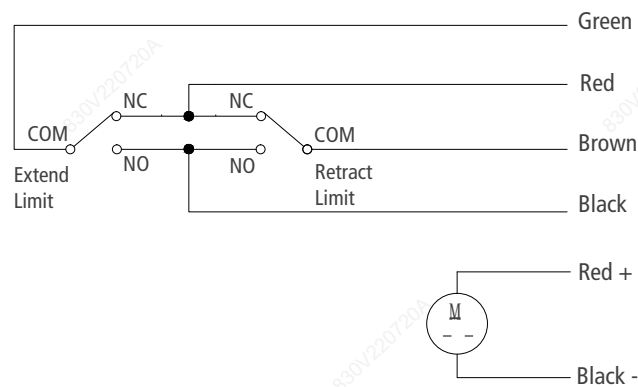

Power Wire Coding		
	Black	Red
Extend	-	+
Retract	+	-
Signal Wire Coding		
Black	Extend / Retract limit, N.O.	
Red	Extend / Retract limit, N.C.	
Green	Extend limit. COM.	
Brown	Retract limit. COM.	

[Table 7]


2. Hall Sensor (standard dual-sensor)

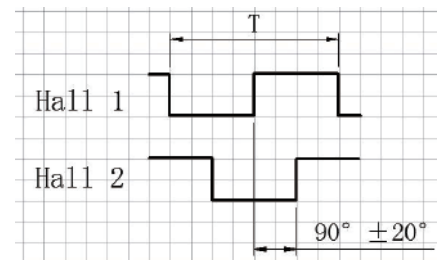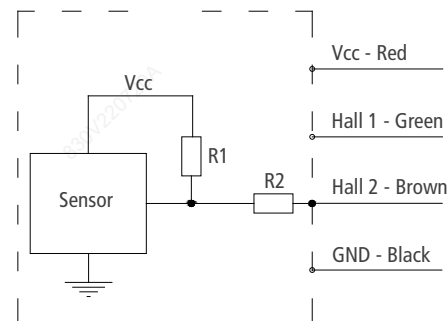

* Power supply (V)= 5~15V

Code	Pulse Equivalent per Sensor (pulse/mm)	
A	4 pole pairs (standard)	50.47
B		32.00
C		25.24
D		16.00
E		12.62
F		8.00

[Table 8]

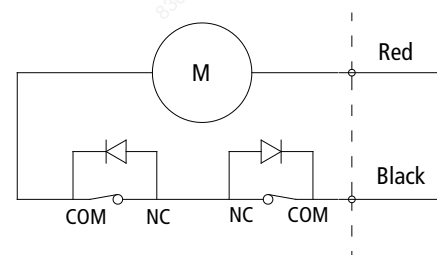

Internal Motor Wiring

3. Reed switch

No\i_\m_ I)J)^jio\^o) Jkodjii\g I)>)^jio\^o)

Inquiry Table

RESET

	Voltage	1 = 12VDC 2 = 24VDC 3 = 36VDC 4 = 48VDC
	Load & Speed	See [Table 2]
	Stroke (mm)	Please contact us if the stroke you required is out of range.
	Install. Length (mm)	See Table [3] - [5]
	Front Mount. End	F01 - F09, or FX = Custom
	Rear Mount. End	R01 - R07, or RX = Custom
	Mount. Hole Direction	Front 1 = 90° 2 = 0° Rear 1 = 90° 2 = 0°
	Signal Feedback	0 = None 1 = Endstop Signal 2 = Hall Sensor 3 = Reed Switches
	Cable Length	1 = 500 mm 2 = 1,000 mm X = Custom
	Connector	0 = Tinned bared wires 1 = Go with KZ control X = Custom
	Working Temperature	1 = -10℃ to 65℃ 2 = -40℃ to 65℃
Application	Working Frequency	Estimated cycles work per day
		Indoor or outdoor, and please describe your end use.
	End Use	
	Your Contact	Company Name Tel. Email

Terms of Use

Due to our continuous improving of HB products, Hongba reserves the right to change or modify our products without prior notice, at any time. Therefore, Hongba cannot guarantee the correct and actual status of said information on its products. The user is responsible for determining the suitability of HB products for specific application.

Wuxi Hongba Mechanical Electrical Equipment. Co., Ltd.

Cell:

Email:

Tel.: 0510-85436730


Website: hbactuator.com

Address: 5 Lijiang Rd. Xinwu District, Wuxi 214028 China

 You may also be interested in...

Model	Load (N)	Stroke (mm)	Speed (mm/s)	Install.Length (mm)	Overall Size (mm)	IP rate	Application
DJ803 (Track)	1,500	50-600	16-32	155	155 x 77.4 x L	IP20	Furniture
DJ823	3,000	50-600	5.0-15	S+155	148.5 x 80 x L	IP54	Furniture Medical Care
DJ810	4,000	50-600	5.0-32	S+150	156 x 83 x L	IP43	Furniture Medical Care
DJ801	6,000	50-600	4.7-28	S+175	156 x 83 x L	IP43	Furniture Medical Care
DJ822	6,000	50-600	5.0-16	S+175	166 x 91 x L	IP54	Furniture Medical Care
DJ806	1,200	50-600	5.5-80	S+105	40 x 75 x L	IP66	Industrial
DJ809	2,000	50-600	5.0-55	S+108	45 x 77.5 x L	IP66	Industrial
DJ825	2,000	50-600	6-15	S+115	43 x 84.5 x L	IP66	Furniture Medical Care Industrial
DJ820	2,500	50-600	2.5-22	S+120	64.5 x 102 x L	IP66	Furniture Medical Care Industrial
DJ820P	1,000	50-600	25-50	S+140	64.5 x 102 x L	IP66	Industrial
* DJ830	4,000	50-600	5.5-35	S+200	76 x 151 x L	IP65	Industrial
DJ830P	7,000	50-600	5.5-35	S+200	76 x 151 x L	IP65	Industrial
DJ808	7,000	50-600	5.5-35	S+250	77 x 151 x L	IP65	Industrial
DJ805G	12,000	50-1,000	6.5-37	S+200	102 x 154 x L	IP66	Industrial

* You are now reading...

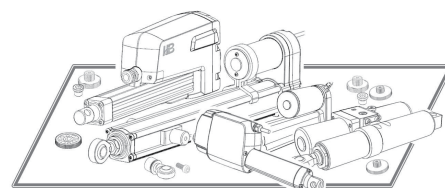

For more information, please visit our website hbactuator.com